



Hardening Cabinets

The Global Series Hardening Cabinet is known for quality, performance and reliability and has set the standard for use in hardening batch ice cream products and cakes.

Global offers three models to choose from in the product line. A single-door -30°F model, a quad-door -30°F model and a quad-door -40°F model.



FEATURES:

- New refrigerant/compressor design
- Digital temperature control with digital display
- New CRO valve
- Door switches
- Large face area on condenser means easier cleaning and efficient operation
- Expansion valve refrigerant control provides quicker pull-down and reduces compressor run time
- Dual fan extended surface evaporator coil produces lower frost accumulation on cabinet walls
- Manual defrost with external drain hose connection
- Durable powder-coat paint finish
- Heated drain pan dissipates condensation, no plumbing required
- Fin & tube forced-air evaporator and condenser
- R404a refrigerant

Project:

Quantity:

Item#:

Model Specified:

Approval: _____

Ice Cream Hardening Cabinets

TECHNICAL DATA

MODEL	T30HSP	T50HSQL	T50HSQHP
Temp Range	0°F to -30°F	0°F to -30°F	0°F to -40°F
Exterior Dimensions			
Length	31"	52"	52"
Depth	36 ⁵ / ₁₆ "	36 ⁵ / ₁₆ "	36 ⁵ / ₁₆ "
Height	83 ³ / ₄ "	83 ³ / ₄ "	83 ³ / ₄ "
Electrical			
Rated Amps	11.5	16.0	7.4
Unit HP	½	1	1½
Cubic Feet	27.3	49.1	49.1
Shipping Weight	637 lbs.	898 lbs.	898 lbs.

SPECIFICATIONS


Item: _____

Furnish () quantity, Hardening Cabinet, Global model _____ KDC _____.


The unit construction shall consist of a white powder-coat finished galvanized steel interior and exterior. The unit will be shipped with four cantilever shelves and a bottom rack per full door opening.

Cabinet is specified to use R-404a refrigerant. Refrigeration control shall be mechanical control with a temperature range of 0°F to -10°F or 0°F to -40°F depending upon model.

Cabinet to have standard one-year parts and labor with an extended four-year compressor part only warranty. Cabinet to be UL, C-UL, and NSF listed.







NEMA 5-15P



NEMA 5-20P

Conduit connected on T50HSQHP

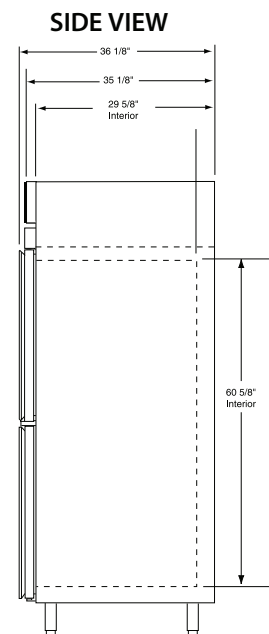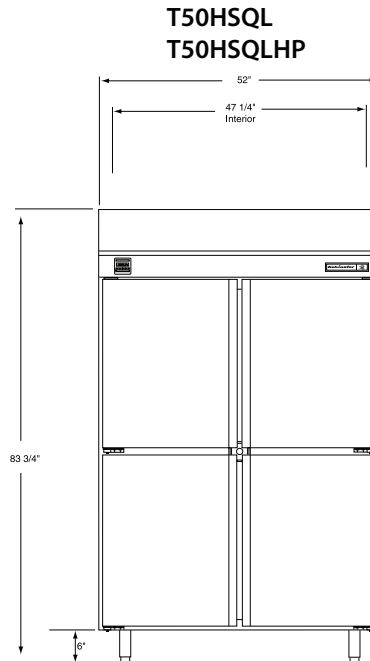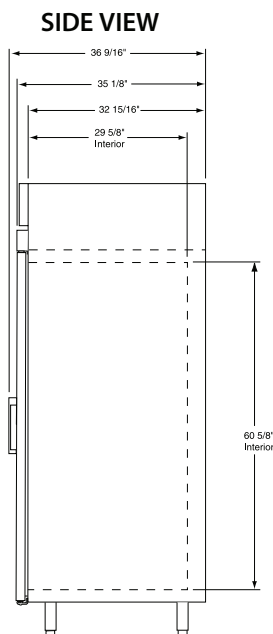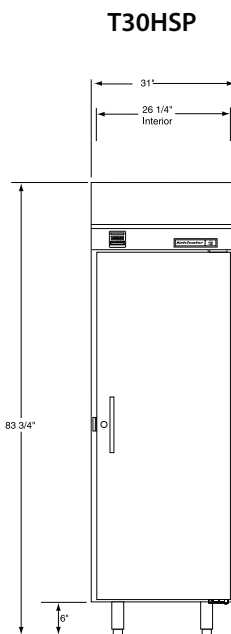

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com